


CAPIOX® Cardioplegia

The clear choice for convenient, safe and efficient cardioplegia delivery

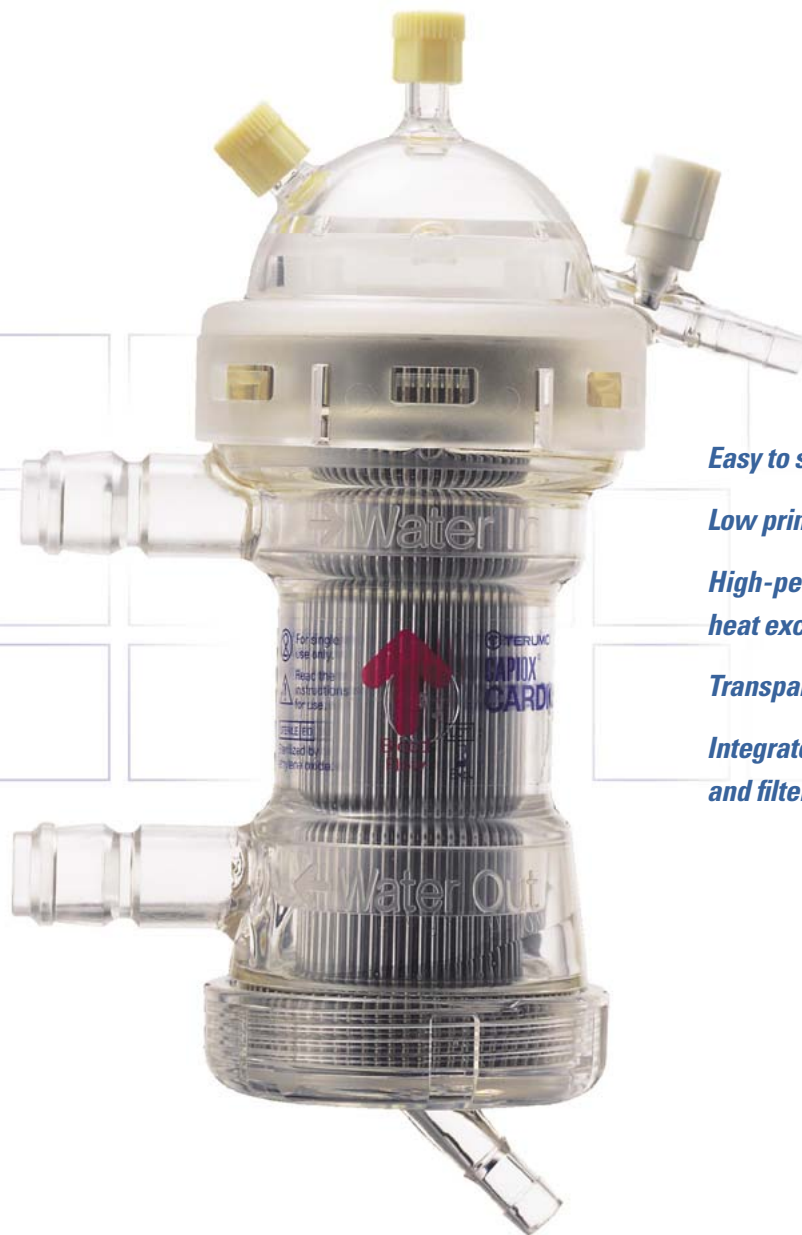

Easy to set up and prime

Low priming volume

*High-performance, stainless steel
heat exchanger*

Transparent polycarbonate housing

*Integrated air trapping chamber
and filter for air removal*

CAPIOX® Cardioplegia

CAPIOX quality in cardioplegia delivery

High-performance heat exchanger

The CAPIOX Cardioplegia makes cardioplegia solution temperature management and control easy and convenient. The extremely efficient heat exchanger provides the ability to make rapid changes to the temperature of the cardioplegia solution using a single-pass structure. Use of a thermistor probe allows accurate and convenient temperature monitoring.


Easy to prime

Compact in size, the CAPIOX Cardioplegia uses a straight, bottom-to-top fluid flow path allowing quick, easy priming with minimal volume (52 mL). The clear, polycarbonate housing provides high visibility and allows fluids to be easily monitored.

Multiple safety features

The CAPIOX Cardioplegia incorporates a flow-through design, allowing blood to pass through thin stainless steel pipes and a filter screen prior to returning to the patient. Designed with a large (21 mL) air-trapping chamber with an air vent port, and a 96 µm filter, the CAPIOX Cardioplegia provides added protection against passing air to your patient.

The pressure monitoring port easily allows a pressure gauge to be incorporated into the line for additional safety.

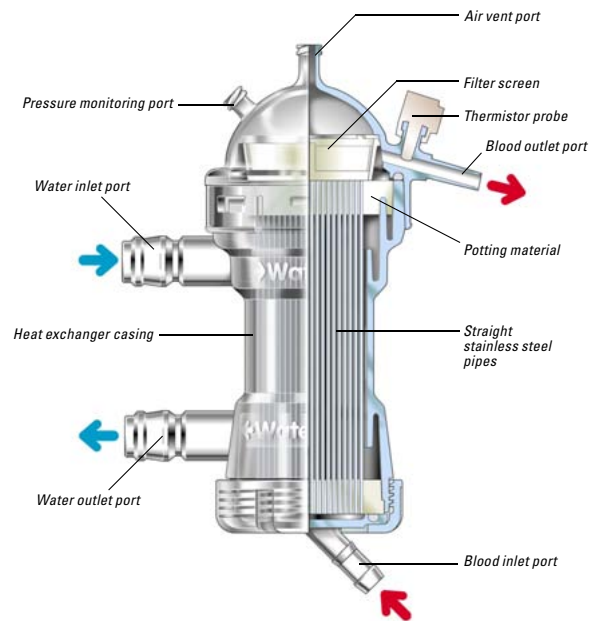


Specifications

Housing material		Polycarbonate (clear)
Heat exchanger	Type	Straight pipe
	Material	Stainless steel
	Effective surface area	640 cm ²
	Potting material	Polyurethane
Filter screen	Material	Polyester
	Pore size	96 µm
	Support material	Polypropylene
Priming volume		52 mL
Blood port size	Inlet port	1/4" (6.4 mm)
	Outlet port	3/16" (4.8 mm)
Water port	Type	Hansen Quick Connect Fitting
	Size	1/2" (12.7 mm)
Maximum blood flow rate		500 mL/min.
Maximum operation pressure	Blood side	500 mmHg (67 kpa)
	Water side	29 psi (2 ATM, 203 kpa)
Method of sterilization		Ethylene oxide gas
Holder		1XX*XH081

Ordering information

CATALOG NUMBER	DESCRIPTION	UNITS/CASE
62556	Cardioplegia set, 4:1 ratio, with bridge	6

Heat exchanger performance factor (in-vitro)

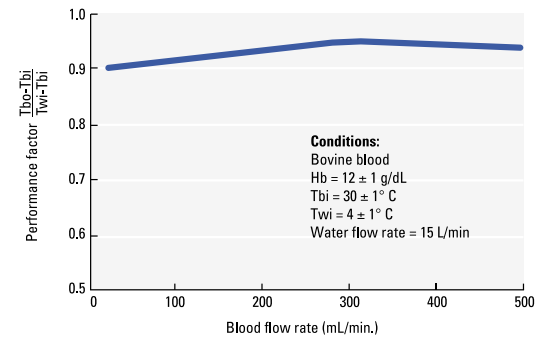

For more information, contact:

TERUMO CARDIOVASCULAR
SYSTEMS CORPORATION
6200 Jackson Road
Ann Arbor, Michigan 48103-9300
USA
734 663 4145 phone
734 663 7981 fax
800 521 2818 toll free

TERUMO CORPORATION
44-1, 2-chome
Hatagaya, Shibuya-ku
Tokyo 151-0072
Japan
81 3 3374 8111 phone
81 3 3374 8196 fax

TERUMO EUROPE N.V.
Authorized EC Representative
Interleuvenlaan 40 B-3001
Leuven
Belgium
32 16 38 12 11 phone
32 16 40 02 49 fax

TERUMO EUROPE N.V.
Cardiovascular Division
Hauptstrasse 87
D-65760 Eschborn
Germany
49 6196 8023 500 phone
49 6196 8023 555 fax

TERUMO LATIN AMERICA
CORPORATION
8750 NW 36th Street, Suite 600
Miami, Florida 33178
USA
305 477 4822 phone
305 477 4872 fax
800 283 7866 toll free